

SECURITHERM thermostatic basin mixer

Ref. H960015

Single hole thermostatic sequential mixer, H. 95mm L. 120mm

2025 UK public price excluding VAT: £358.02

DESCRIPTION

SECURITHERM thermostatic basin mixer - Ref. H960015

Deck-mounted SECURITHERM thermostatic basin mixer.
Thermostatic sequential mixer: opens and closes with cold water.
No risk of cross flow between hot and cold water.
No non-return valves on the inlets.
Anti-scalding failsafe: shut-offs automatically if cold or hot water supply fails.
Securitouch thermal insulation prevents burns.
Single hole mixer with curved spout H. 95mm L. 120mm, equipped with a hygienic flow straightener with no impurity retention and will withstand thermal shocks.
Scale-resistant sequential thermostatic cartridge for single lever control of the flow rate and temperature.
Temperature control from cold water up to 40°C with temperature limiter set at 40°C.
Tested without water to comply with NHS requirements. No pre-set temperature.
Thermal or chemical shocks are possible.
Body and spout with smooth interiors and low water volume.
Flow rate limited to 5 lpm at 3 bar.
No manual contact thanks to Hygiene control lever L. 146mm.
No pop-up waste.
PEX flexibles F3/8" supplied with stopcocks in chrome-plated brass, filters and Ø 15mm compression fittings.
Fixing reinforced by 2 stainless steel rods.
Mixer ideal for healthcare facilities, nursing homes, hospitals and clinics.
Mixer Suitable for people with reduced mobility.
Mixer with 30-year warranty.
Also available with copper tails.

TECHNICAL CHARACTERISTICS

SECURITHERM thermostatic basin mixer - Ref. H960015

Connector	M1/2" Ø 15mm
Technology	SECURITHERM Securitouch sequential mixer
Drop height	95mm
Spout length	120mm
Flow rate	5 lpm
Temperature limiter	Yes
Finish	Chrome-plated brass



ADVANTAGES



Sequential: opens/closes with cold water




Maximum hygiene: no non-return valves



SECURITHERM: optimal anti-scalding safety



Securitouch: thermal insulation prevents burns

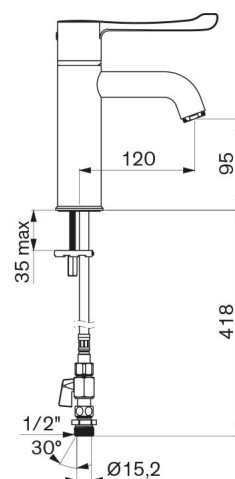

Norms



Warranty



Repairability

