

# SECURITHERM thermostatic basin mixer

Ref. H960015

Single hole thermostatic sequential mixer, H. 95mm L. 120mm

2026 UK public price excluding VAT: £368.76



## DESCRIPTION

**SECURITHERM thermostatic basin mixer - Ref. H960015**





Deck-mounted SECURITHERM thermostatic basin mixer.  
 Thermostatic sequential mixer: opens and closes with cold water.  
 No risk of cross flow between hot and cold water.  
 No non-return valves on the inlets.  
 Anti-scalding failsafe: shut-offs automatically if cold or hot water supply fails.  
 Securitouch thermal insulation prevents burns.  
 Single hole mixer with curved spout H. 95mm L. 120mm, equipped with a hygienic flow straightener with no impurity retention and will withstand thermal shocks.  
 Scale-resistant sequential thermostatic cartridge for single lever control of the flow rate and temperature.  
 Temperature control from cold water up to 40°C with temperature limiter set at 40°C.  
 Tested without water to comply with NHS requirements. No pre-set temperature.  
 Thermal or chemical shocks are possible.  
 Body and spout with smooth interiors and low water volume.  
 Flow rate limited to 5 lpm at 3 bar.  
 No manual contact thanks to Hygiene control lever L. 146mm.  
 No pop-up waste.  
 PEX flexibles F3/8" supplied with stopcocks in chrome-plated brass, filters and Ø 15mm compression fittings.  
 Fixing reinforced by 2 stainless steel rods.  
 Mixer ideal for healthcare facilities, nursing homes, hospitals and clinics.  
 Mixer Suitable for people with reduced mobility.  
 Mixer with 30-year warranty.  
 Also available with copper tails.


## TECHNICAL CHARACTERISTICS

**SECURITHERM thermostatic basin mixer - Ref. H960015**

Connector	M1/2" Ø 15mm
Technology	SECURITHERM Securitouch sequential mixer
Drop height	95mm
Spout length	120mm
Flow rate	5 lpm
Temperature limiter	Yes
Finish	Chrome-plated brass

## ADVANTAGES

-  Sequential: opens/closes with cold water
-  Maximum hygiene: no non-return valves
-  SECURITHERM: optimal anti-scalding safety
-  Securitouch: thermal insulation prevents burns

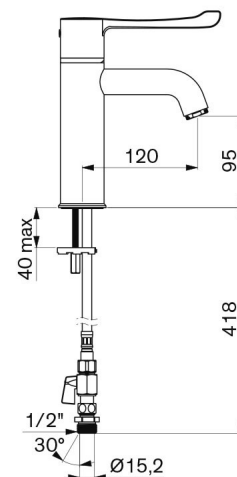

---

Norms



---

Warranty



---

Repairability

