

SECURITHERM thermostatic basin mixer

Ref. H9600610

Single hole thermostatic sequential mixer, H. 95mm L. 120mm

2026 UK public price excluding VAT: £425.09

DESCRIPTION

SECURITHERM thermostatic basin mixer - Ref. H9600610

Deck-mounted SECURITHERM thermostatic basin mixer.
 Thermostatic sequential mixer: opens and closes with cold water.
 No risk of cross flow between hot and cold water.
 No non-return valve on the inlets.
 Anti-scalding failsafe: shuts off automatically if cold or hot water supply fails.
 Securitouch thermal insulation prevents burns.
 Single hole mixer with straight spout H. 95mm L. 120mm fitted with a hygienic flow straightener for no impurity retention and resistance to thermal shocks.
 Scale-resistant thermostatic sequential cartridge for single control of flow rate and temperature.
 Temperature can be adjusted from cold water up to 40°C with maximum temperature limiter set at 40°C.
 Tested without water to comply with NHS requirements. No pre-set temperature.
 Thermal and chemical shocks are possible.
 Body and spout with smooth interiors and low water volume.
 Flow rate limited to 5 lpm at 3 bar.
 No manual contact thanks to Hygiene control lever L. 146mm.
 No pop-up waste.
 Supplied with copper tails and stopcocks in chrome-plated brass.
 Fixing reinforced by 2 stainless steel rods.
 Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
 Mixer suitable for people with reduced mobility.
 30-year warranty.
 Also available with PEX flexibles.

TECHNICAL CHARACTERISTICS


SECURITHERM thermostatic basin mixer - Ref. H9600610

Connector	M1/2" Ø 15mm
Technology	SECURITHERM Securitouch sequential mixer
Drop height	95mm
Spout length	120mm
Flow rate	5 lpm
Temperature limiter	Yes
Finish	Chrome-plated brass



ADVANTAGES

-  Sequential: opens/closes with cold water
-  Maximum hygiene: no non-return valves
-  SECURITHERM: optimal anti-scalding safety
-  Securitouch: thermal insulation prevents burns

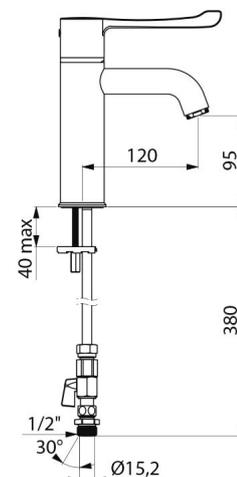

Norms



Warranty



Repairability

