

# SECURITHERM thermostatic basin mixer

Ref. H9600610

Single hole thermostatic sequential mixer, H. 95mm L. 120mm

2025 UK public price excluding VAT: £412.71


## DESCRIPTION

SECURITHERM thermostatic basin mixer - Ref. H9600610

Deck-mounted SECURITHERM thermostatic basin mixer.  
Thermostatic sequential mixer: opens and closes with cold water.  
No risk of cross flow between hot and cold water.  
No non-return valve on the inlets.  
Anti-scalding failsafe: shuts off automatically if cold or hot water supply fails.  
Securitouch thermal insulation prevents burns.  
Single hole mixer with straight spout H. 95mm L. 120mm fitted with a hygienic flow straightener for no impurity retention and resistance to thermal shocks.  
Scale-resistant thermostatic sequential cartridge for single control of flow rate and temperature.  
Temperature can be adjusted from cold water up to 40°C with maximum temperature limiter set at 40°C.  
Thermal and chemical shocks are possible.  
Body and spout with smooth interiors and low water volume.  
Flow rate limited to 5 lpm at 3 bar.  
No manual contact thanks to Hygiene control lever L. 146mm.  
No pop-up waste.  
Supplied with copper tails and stopcocks in chrome-plated brass.  
Fixing reinforced by 2 stainless steel rods.  
Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.  
Mixer suitable for people with reduced mobility.  
30-year warranty.  
Also available with PEX flexibles.





## TECHNICAL CHARACTERISTICS


SECURITHERM thermostatic basin mixer - Ref. H9600610

Connector	M1/2" Ø 15mm
Technology	SECURITHERM Securitouch sequential mixer
Drop height	95mm
Spout length	120mm
Flow rate	5 lpm
Temperature limiter	Yes
Finish	Chrome-plated brass
Norms	



## ADVANTAGES

-  Sequential: opens/closes with cold water
-  Maximum hygiene: no non-return valves
-  SECURITHERM: optimal anti-scalding safety
-  Securitouch: thermal insulation prevents burns

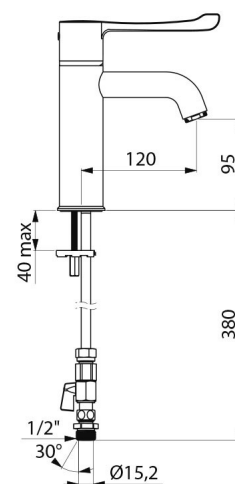

Warranty



Repairability

