

SECURITHERM thermostatic basin mixer

Ref. H9600610L

Single hole sequential thermostatic mixer, H. 95mm L. 120mm

2024 UK public price excluding VAT: £422.89



DESCRIPTION

SECURITHERM thermostatic basin mixer - Ref. H9600610L

Deck-mounted thermostatic SECURITHERM basin mixer.
 Sequential thermostatic mixer: opens and closes with cold water.
 No risk of cross flow between hot and cold water.
 No non-return valve on the inlets.
 Anti-scalding failsafe: shuts off automatically if cold or hot water supply fails.
 Securitouch thermal insulation prevents burns.
 Single hole mixer with curved spout H. 95mm L. 120mm fitted with a hygienic flow straightener, no build-up of impurities and withstands thermal shocks.
 Scale-resistant sequential thermostatic cartridge for single control of flow rate and temperature.
 Temperature can be adjusted from cold water up to 40°C with maximum temperature limiter set at 40°C.
 Thermal and chemical shocks are possible.
 Body and spout with smooth interiors and low water volume.
 Flow rate limited to 5 lpm at 3 bar.
 No manual contact thanks to Hygiene control lever L. 146mm.
 Without pop-up waste.
 Supplied with copper tails and stopcocks in chrome-plated brass.
 Reinforced fixing via 2 stainless steel rods.
 Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
 Mixer suitable for people with reduced mobility.
 30-year warranty.
 Also available with PEX flexibles.

ADVANTAGES



Sequential: opens/closes with cold water



Maximum hygiene: no non-return valves



SECURITHERM: optimal anti-scalding safety




Securitouch thermal insulation prevents burns

TECHNICAL CHARACTERISTICS

SECURITHERM thermostatic basin mixer - Ref. H9600610L

Connector	M1/2" Ø 15mm
Technology	SECURITHERM Securitouch sequential mixer
Drop height	95mm
Spout length	120mm
Flow rate	5 lpm
Temperature limiter	Yes
Finish	Chrome-plated brass
Norms	 
Warranty	

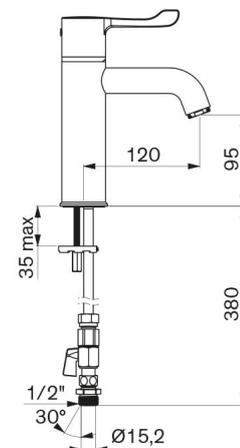

Repairability

