

SECURITHERM BIOCLIP

thermostatic sink mixer

Ref. H9611P

Wall-mounted thermostatic sequential mixer

2025 UK public price excluding VAT: £582.59







DESCRIPTION

SECURITHERM BIOCLIP thermostatic sink mixer - Ref. H9611P

Wall-mounted SECURITHERM thermostatic sink mixer.
 Thermostatic sequential mixer: opens and closes with cold water.
 No risk of cross flow between hot and cold water.
 No non-return valves on the inlets.
 Mixer supplied with 2 chrome-plated brass spouts L. 126mm.
 Anti-scalding failsafe: shuts off automatically if cold or hot water supply fails.
 Securitouch thermal insulation prevents burns.
 Scale-resistant sequential thermostatic cartridge for sequential control of flow rate and temperature.
 Temperature can be adjusted from cold water up to 40°C with temperature limiter set at 40°C.
 Tested without water to comply with NHS requirements. No pre-set temperature.
 Thermal or chemical shocks are possible.
 Body and spout with smooth interiors and low water volume.
 Flow rate regulated at 7 lpm.
 Chrome-plated brass body.
 No manual contact thanks to Hygiene control lever L. 146mm.
 Mixer with 150mm centres, supplied with 2 in-line STOP/CHECK connectors ideal for hospitals.
 Thermostatic mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
 Sequential mixer suitable for people with reduced mobility.
 Mixer with 30-year warranty.



ADVANTAGES

-  Sequential: opens/closes with cold water
-  Maximum hygiene: no non-return valves
-  Removable spout: reduces bacterial development
-  SECURITHERM: optimum anti-scalding safety

TECHNICAL CHARACTERISTICS

SECURITHERM BIOCLIP thermostatic sink mixer - Ref. H9611P

Connector	M1/2"
Technology	SECURITHERM BIOCLIP sequential mixer
Height	141mm
Width	184mm
Spout length	126mm
Flow rate	7 lpm
Temperature limiter	Yes
Finish	Chrome-plated brass

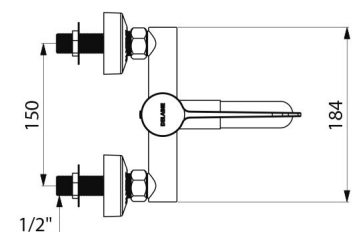

Norms



Warranty



Repairability

