

# SECURITHERM BIOCLIP

## thermostatic sink mixer

Ref. H9611P

Wall-mounted thermostatic sequential mixer

2025 UK public price excluding VAT: £582.59







### DESCRIPTION

SECURITHERM BIOCLIP thermostatic sink mixer - Ref. H9611P

Wall-mounted SECURITHERM thermostatic sink mixer.  
Thermostatic sequential mixer: opens and closes with cold water.  
No risk of cross flow between hot and cold water.  
No non-return valves on the inlets.  
Mixer supplied with 2 stainless steel spouts L. 136mm.  
Anti-scalding failsafe: shuts off automatically if cold or hot water supply fails.  
Securitouch thermal insulation prevents burns.  
Scale-resistant sequential thermostatic cartridge for sequential control of flow rate and temperature.  
Temperature can be adjusted from cold water up to 40°C with temperature limiter set at 40°C.  
Thermal or chemical shocks are possible.  
Body and spout with smooth interiors and low water volume.  
Flow rate regulated at 7 lpm.  
Chrome-plated brass body.  
No manual contact thanks to Hygiene control lever L. 146mm.  
Mixer with 150mm centres, supplied with 2 in-line STOP/CHECK connectors ideal for hospitals.  
Thermostatic mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.  
Sequential mixer suitable for people with reduced mobility.  
Mixer with 30-year warranty.


### ADVANTAGES

-  Sequential: opens/closes with cold water
-  Maximum hygiene: no non-return valves
-  Removable spout: reduces bacterial development
-  SECURITHERM: optimum anti-scalding safety

### TECHNICAL CHARACTERISTICS

SECURITHERM BIOCLIP thermostatic sink mixer - Ref. H9611P

Connector	M1/2"
Technology	SECURITHERM BIOCLIP sequential mixer
Height	141mm
Width	184mm
Spout length	136mm
Flow rate	7 lpm
Temperature limiter	Yes
Finish	Chrome-plated brass

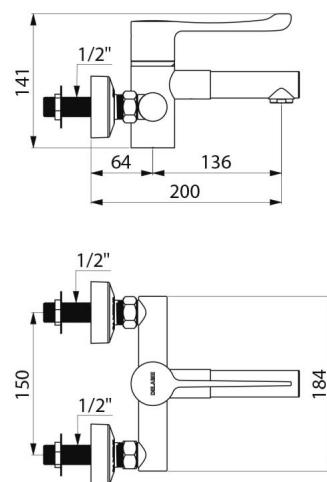

Norms



Warranty

