

# TEMPOMATIC tap with BIOCLIP spout

Ref. 20804T2

Electronic wall-mounted tap with stainless steel spout

2024 UK public price excluding VAT: £508.38



## DESCRIPTION

TEMPOMATIC tap with BIOCLIP spout - Ref. 20804T2

Wall-mounted electronic basin tap for mounting on panels.  
Electronic tap with BIOCLIP removable spout  
Infrared tap supplied with 2 removable BIOCLIP stainless steel spouts L. 129mm.  
Independent IP65 electronic control unit.  
230/12V mains supply with transformer.  
Base and spout with smooth interiors (reduces bacterial development).  
Adjustable duty flush (pre-set at ~60 seconds every 24 hours after last use).  
Flow rate limited to 4 lpm at 3 bar.  
Shock-resistant infrared presence detection sensor.  
Separate sensor for mounting on panels.  
M3/8" solenoid valve with integrated filter.  
Ø 60mm chrome-plated brass base.  
Anti-blocking security.  
Recommended installation height: 110 - 200mm above the basin surface.  
Electronic tap suitable for use in healthcare facilities, retirement and care homes, hospitals and clinics.  
Electronic tap suitable for people with reduced mobility.  
30-year warranty.  
Two shut-off options:  
- standard mode: timed flow with automatic shut-off.  
- ON/OFF mode: user shuts off flow voluntarily or automatic shut-off after 30 minutes of flow.  
Thermal shocks are possible.  
Mount the sensor beside the tap in the ON/OFF mode.

## ADVANTAGES



Automatic duty flush limits bacterial development



Hygiene: spout can be removed and descaled inside



Hygiene: smooth interior reduces bacteria




No manual contact: infrared sensor

## TECHNICAL CHARACTERISTICS

TEMPOMATIC tap with BIOCLIP spout - Ref. 20804T2

Connector	3/8"
Technology	Wall-mounted electronic tap
Depth	190mm
Length	129mm
Spout length	188mm
Flow rate	4 lpm at 3 bar
Finish	Chrome-plated brass
Norms	ACS CE
Warranty	30 YEARS WARRANTY

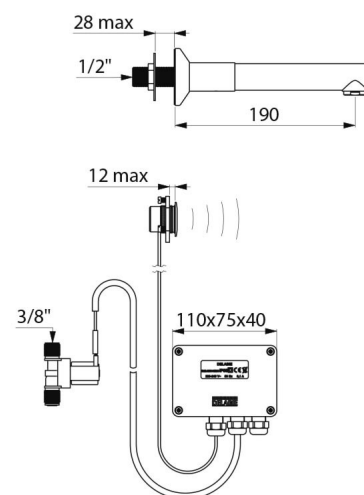

Repairability

