

TEMPOMATIC tap with BIOCLIP removable spout

Ref. 20804T215

Wall-mounted electronic tap with mains supply

2024 UK public price excluding VAT: £534.92



DESCRIPTION

TEMPOMATIC tap with BIOCLIP removable spout - Ref. 20804T215

Wall-mounted electronic basin tap for installation on panels.
Electronic tap with removable BIOCLIP spout.
Infrared tap supplied with 2 removable stainless steel spouts L. 129mm.
Separate IP65 electronic control unit.
230/12V mains supply with transformer.
Base and spout with smooth interiors (reduces bacterial development).
Adjustable duty flush (pre-set at ~60 seconds every 24 hours after last use).
Flow rate limited to 4 lpm at 3 bar.
Shock-resistant infrared presence detection sensor.
Separate sensor for mounting on panels.
M3/8" solenoid valve with filter and Ø 15mm conical inlets.
Ø 60mm chrome-plated brass base.
Anti-blocking security.
Recommended installation height: 110 - 200mm above the basin surface.
Electronic tap ideal for healthcare facilities, retirement and care home, hospitals and clinics.
Electronic tap suitable for people with reduced mobility.
30-year warranty.
Two shut-off options:
- standard mode: timed flow with automatic shut-off.
- ON/OFF mode: user shuts off flow voluntarily or automatic shut-off after 30 minutes of flow.
Thermal shocks are possible.
Mount the sensor to the side of the tap in the ON/OFF mode.

TECHNICAL CHARACTERISTICS

TEMPOMATIC tap with BIOCLIP removable spout - Ref. 20804T215

Connector	Ø 15mm
Technology	Wall-mounted electronic tap
Depth	190mm
Length	129mm
Spout length	188mm
Flow rate	4 lpm at 3 bar
Finish	Chrome-plated brass
Norms	CE
Warranty	30 YEARS WARRANTY

ADVANTAGES



Automatic duty flush limits bacterial development




Hygiene: spout can be removed and descaled inside



Hygiene: smooth interior reduces bacteria



No manual contact: infrared sensor

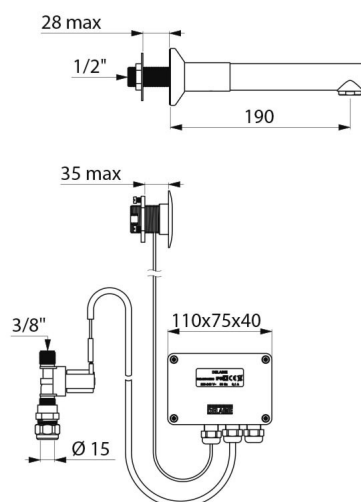

Repairability

