

# Aluminium shower panel with SECURITHERM sequential mixer

Ref. H963615

Thermostatic shower panel with mixer and no non-return valves

2025 UK public price excluding VAT: £854.49

## DESCRIPTION

Aluminium shower panel with SECURITHERM sequential mixer - Ref. H963615

SECURITHERM anodised aluminium shower panel for wall-mounted exposed installation.

SECURITHERM thermostatic sequential shower mixer (non-time flow).

Thermostatic sequential shower mixer: opens and closes with cold water.

Mixer with no non-return valves on the inlets (reduces bacterial proliferation).

No risk of cross flow between the hot and cold water.

Sequential mixer with anti-scalding failsafe: shuts off automatically if cold water supply fails.

Cold water failsafe prevents cold showers: shuts off automatically if hot water supply fails.

Temperature control from cold water up to 39°C.

Temperature limiter set at 39°C, can be adjusted.

Thermal shocks are possible.

Flow rate 9 lpm at 3 bar.

Sliding handset on chrome-plated rail with flexible shower hose removable with push fit rapid STOP connector.

Hygiene control lever L. 100mm.

Top inlets with M1/2" inline stopcocks.

Copper tubes.

Concealed fixings. Filters.

Shower panel suitable for healthcare facilities, retirement and care homes, hospitals and clinics.

Suitable for people with reduced mobility.

30-year warranty.

## TECHNICAL CHARACTERISTICS

Aluminium shower panel with SECURITHERM sequential mixer - Ref. H963615

|                     |                                               |
|---------------------|-----------------------------------------------|
| Supply              | Top inlets via inline stopcocks M1/2"         |
| Connector           | M1/2", Ø 15mm                                 |
| Technology          | SECURITHERM single control thermostatic mixer |
| Height              | 1045mm                                        |
| Width               | 210mm                                         |
| Flow rate           | 9 lpm                                         |
| Temperature limiter | 39°C                                          |
| Finish              | Aluminium                                     |



## ADVANTAGES



SECURITHERM: Optimum anti-scalding safety




Maximum hygiene: no non-return valves



Thermostatic: total temperature stability



Sequential: open and closing on cold water

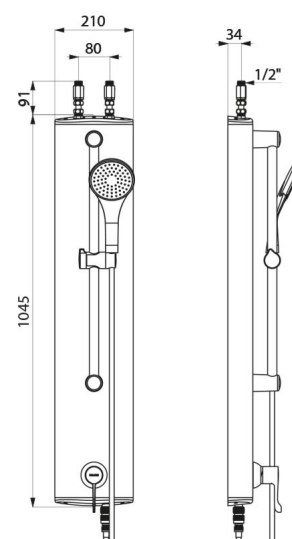

Warranty

