

SECURITHERM dual control shower panel

Ref. 792334

Time flow thermostatic and mechanical dual control

2025 UK public price excluding VAT: £1,183.43

DESCRIPTION

SECURITHERM dual control shower panel - Ref. 792334

Dual control thermostatic shower panel:
Large model satin stainless steel shower panel for wall mounted, exposed installation.
With concealed inlet via flexibles, M $\frac{1}{2}$ ".
SECURITHERM thermostatic shower mixer.
Adjustable temperature control from cold water up to 38°C with 1st limiter set at 38°C and 2nd limiter set at 41°C.
Anti-scalding failsafe: automatic shut-off if cold water fails.
Anti-cold showers function: automatic shut-off if hot water fails.
Chrome-plated, tamperproof, scale-resistant, fixed, ROUND shower head with automatic flow rate regulation at 6 lpm at 3 bar.
Handset with removable flexible via push-fit rapid STOP connector, wall support supplied.
Time flow valve ~30 seconds with soft-touch operation to control the ROUND shower head
Non-time flow valve to control the handset with flexible hose.
Stopcocks.
Concealed fixings.
Filters and non-return valves.
This product is compatible with thermal and chemical shocks in accordance with current guidelines.
Shower panel suitable for people with reduced mobility.
30-year warranty.

TECHNICAL CHARACTERISTICS

SECURITHERM dual control shower panel - Ref. 792334

Connector	M $\frac{1}{2}$ "
Technology	Non-time flow and time flow
Height	1,220mm
Depth	100mm
Width	250mm
Flow rate	6 lpm
Temperature limiter	Thermostatic
Finish	Stainless steel

Norms



ADVANTAGES



Thermostatic temperature regulation




Immediate shut-off if cold water fails



Fixed or handheld shower head



Stainless steel body, brass controls

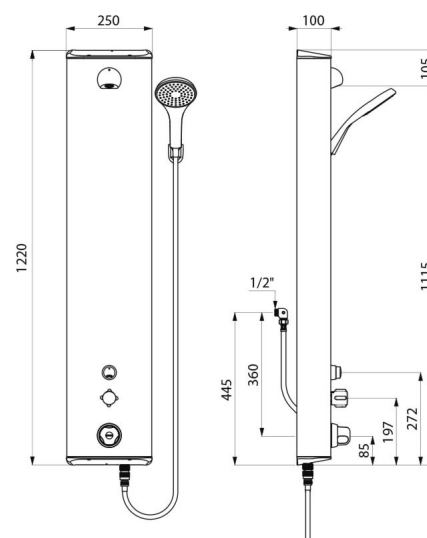

Warranty

