

SECURITHERM shower panel

Ref. 792404CF

Electronic thermostatic battery-operated, comfort 10 lpm

2024 UK public price excluding VAT: £1,306.93

DESCRIPTION

SECURITHERM shower panel - Ref. 792404CF

SECURITHERM electronic thermostatic shower panel:
Large model stainless steel panel for wall-mounted, exposed installation.
Top inlet via in-line stopcocks M $\frac{1}{2}$ ".
SECURITHERM thermostatic shower mixer.
Adjustable temperature control from cold water up to 38°C with 1st limiter set at 38°C and 2nd limiter set at 41°C.
Anti-scalding failsafe: automatic shut-off if cold water fails.
Anti-cold showers function: automatic shut-off if hot water fails.
Thermal shocks are possible.
Battery-operated with CR-P2 223 6V Lithium battery.
Shower starts when hand is 4cm from the infrared sensor.
Shuts off on demand or automatically after ~60 seconds.
Duty flush (~60 seconds every 24 hours after the last use).
Flow rate 6 lpm at 3 bar.
Chrome-plated, tamperproof, scale-resistant, fixed, ROUND shower head with automatic flow rate regulation.
Integrated soap dish.
Concealed fixings.
Filters and non-return valves.
Time flow shower panel suitable for people with reduced mobility.
30-year warranty.





TECHNICAL CHARACTERISTICS


SECURITHERM shower panel - Ref. 792404CF

Supply	6V battery
Connector	M1/2"
Technology	Electronic
Height	1220mm
Depth	100mm
Width	250mm
Flow rate	10 lpm
Temperature limiter	Thermostatic
Finish	Stainless steel
Norms	ACS



ADVANTAGES

-  Total hygiene: operate without manual contact
-  Automatic anti-bacterial proliferation duty flush
-  Thermostatic temperature regulation
-  Instant shut-off if cold water fails

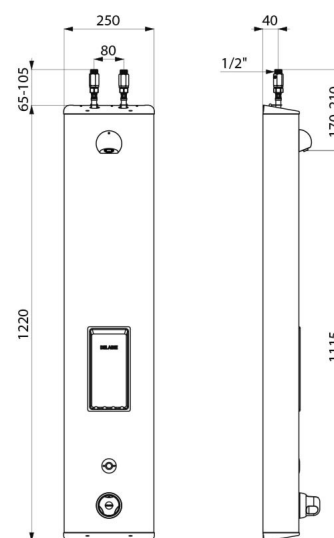

Warranty

