

# SECURITHERM shower panel

Ref. 792413CF

Electronic thermostatic battery-operated

2024 UK public price excluding VAT: £1,263.85

## DESCRIPTION

SECURITHERM shower panel - Ref. 792413CF

SECURITHERM electronic thermostatic shower panel:  
Large model stainless steel panel for wall-mounted, exposed installation.  
Concealed inlet via flexibles M $\frac{1}{2}$ ".  
SECURITHERM thermostatic shower mixer.  
Adjustable temperature control from cold water up to 38°C with 1st limiter set at 38°C and 2nd limiter set at 41°C.  
Anti-scalding failsafe: automatic shut-off if cold water fails.  
Anti-cold showers function: automatic shut-off if hot water fails.  
Thermal shocks are possible.  
Battery-operated with CR-P2 223 6V Lithium battery.  
Shower starts when hand is 4cm from the infrared sensor.  
Shuts off voluntarily or automatically after ~60 seconds.  
Duty flush (~60 seconds every 24 hours after last use).  
Flow rate 6 lpm at 3 bar.  
Chrome-plated, tamperproof ROUND shower head with scale-resistant nozzle and automatic flow rate regulation.  
Concealed fixings.  
Filters and non-return valves.  
M $\frac{1}{2}$ " stopcocks.  
Electronic shower panel suitable for people with reduced mobility.  
30-year warranty.

## TECHNICAL CHARACTERISTICS

SECURITHERM shower panel - Ref. 792413CF

Supply	6V battery
Connector	M $\frac{1}{2}$ "
Technology	Electronic
Height	1220mm
Depth	100mm
Width	250mm
Flow rate	6 lpm
Temperature limiter	Thermostatic
Finish	Stainless steel
Norms	ACS



## ADVANTAGES



Total hygiene: operate without manual contact




Duty flush prevents bacterial proliferation



Thermostatic temperature regulation



Immediate shut-off if cold water fails

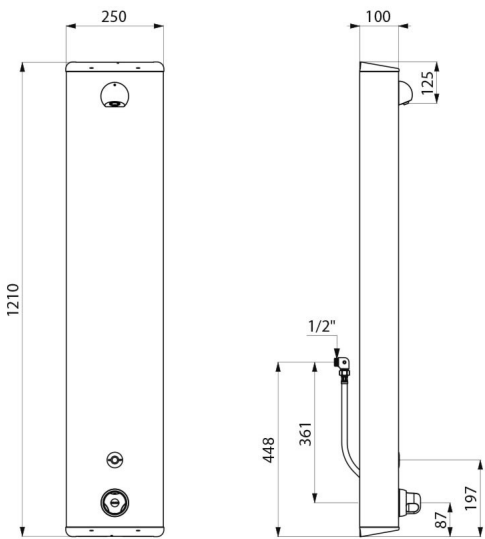

Warranty

