

# Aluminium shower panel with SECURITHERM sequential mixer

Ref. H9634

Sequential thermostatic

2025 UK public price excluding VAT: £717.77

## DESCRIPTION

Aluminium shower panel with SECURITHERM sequential mixer - Ref. H9634

Anodised aluminium shower panel for wall-mounted exposed installation: SECURITHERM sequential thermostatic mixer (non time flow). Adjustable temperature control from cold water up to 39°C; maximum temperature limiter set at 39°C, can be adjusted. Anti-scalding safety: automatic shut-off if cold water supply fails. Anti-cold showers function: automatic shut-off if hot water fails. Thermal shocks are possible. Chrome-plated, tamperproof, scale-resistant ROUND shower head with automatic flow rate regulation at 6 lpm at 3 bar. Comfort rain-effect spray. Hygiene control lever L. 100mm. Concealed supply via M1/2" flexibles. Concealed fixings. Filters. Suitable for people with reduced mobility. 30-year warranty.

## TECHNICAL CHARACTERISTICS

Aluminium shower panel with SECURITHERM sequential mixer - Ref. H9634

|                     |                                                                                                                                                                                                                                                             |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Supply              | Concealed, via M1/2" flexible                                                                                                                                                                                                                               |
| Connector           | M1/2"                                                                                                                                                                                                                                                       |
| Technology          | Sequential thermostatic SECURITHERM                                                                                                                                                                                                                         |
| Height              | 1050mm                                                                                                                                                                                                                                                      |
| Width               | 210mm                                                                                                                                                                                                                                                       |
| Flow rate           | 6 lpm                                                                                                                                                                                                                                                       |
| Temperature limiter | 39°C                                                                                                                                                                                                                                                        |
| Finish              | Aluminium                                                                                                                                                                                                                                                   |
| Norms               |    |
| Warranty            |                                                                                                                                                                          |



## ADVANTAGES



SECURITHERM: Optimum anti-scalding safety




No non-return valves on inlets



Thermostatic: total temperature stability



Sequential open and closing on cold water

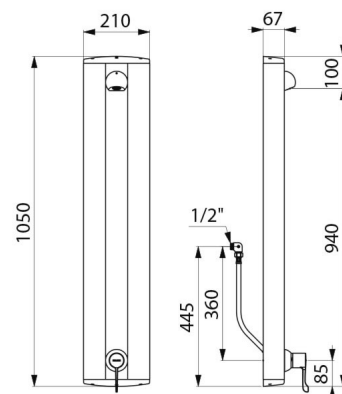

Repairability

