

Aluminium shower panel with SECURITHERM sequential mixer

Ref. H9635

Sequential thermostatic

2026 UK public price excluding VAT: £866.03

DESCRIPTION

Aluminium shower panel with SECURITHERM sequential mixer - Ref. H9635

Anodised aluminium shower panel for wall-mounted, exposed installation: SECURITHERM sequential thermostatic mixer (non time flow).
Adjustable temperature control from cold water up to 39°C; maximum temperature limiter set at 39°C, can be adjusted.
Anti-scalding failsafe: automatic shut-off if cold water fails.
Anti-cold showers function: automatic shut-off if hot water fails.
Thermal shocks are possible.
Flow rate 9 lpm at 3 bar.
Sliding handset on a chrome-plated riser rail with removable flexible hose via rapid push-fit STOP connector.
Hygiene control lever L. 100mm.
Concealed supply via M1/2" flexibles.
Concealed fixings
Filters.
Suitable for people with reduced mobility.
30-year warranty.

TECHNICAL CHARACTERISTICS

Aluminium shower panel with SECURITHERM sequential mixer - Ref. H9635

Supply	Concealed, via M1/2" flexible
Connector	M1/2"
Technology	Sequential thermostatic SECURITHERM
Height	1045mm
Width	210mm
Flow rate	9 lpm
Temperature limiter	39°C
Finish	Aluminium
Norms	ACS  
Warranty	



ADVANTAGES



Sequential: opens/closes with cold water




No non-return valves on inlets



SECURITHERM: optimal anti-scalding safety



Thermostatic: total temperature stability

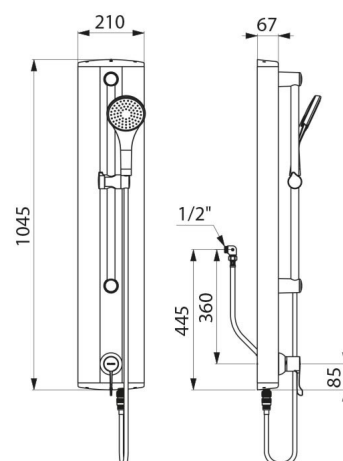

Repairability

