


TEMPOMATIC 4 urinal valve

Ref. 430PBOX-430036

Electronic with integrated batteries

2021 UK public price excluding VAT: £553.65

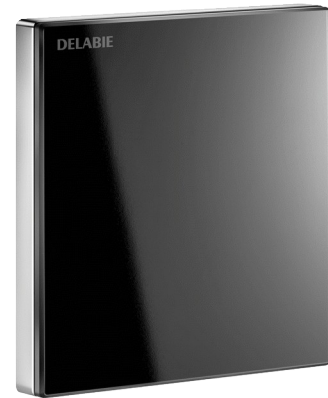

DESCRIPTION

TEMPOMATIC 4 urinal valve - Ref. 430PBOX-430036

Electronic valve for waterproof, recessed individual urinals:
 123 6V Lithium battery-operated.
 Black wall plate 145 x 145mm in shock-resistant vitro-ceramic glass with integrated electronics.

Waterproof recessing housing:

- Collar with waterproof seal.
- Hydraulic connection to the outside and maintenance from the front.
- Adjusts to all types of installation (rails, solid walls, panels).
- Compatible with wall finishes 10 - 120mm (while maintaining the minimum recessing depth of 83mm).
- Suitable for standard or "pipe-in-pipe" supply.
- Stopcock and flow rate adjustment, filter and solenoid valve are all integrated and accessible from the front.
- TEMPOMATIC 4 urinal valve F $\frac{1}{2}$ " is compatible with sea water and grey water.
- Supplied in 2 kits: secure system flush without sensitive elements.
- Shock-resistant infrared presence detection sensor.

Detection delay is 10 seconds.
 3 programmes (rinsing volume can be set according to urinal type).
 High-frequency mode (exclusive to DELABIE):

- Short rinse after each user.
- Additional rinse at the end of the busy period.

Hygienic duty flush every 24 hours (can be adjusted to 12 hours or OFF) after the last use: prevents vacuums.
 Flow rate pre-set at 0.15 L/sec. at 3 bar, can be adjusted.
 Connection with Ø 35mm connection washer (for standard urinals) or $\frac{1}{2}$ " brass connection (for urinals supplied by flexible).
 For use with neck tube 752430 or 757430.
 Suitable for people with reduced mobility.
 10-year warranty.

Kit contents:
 (430PBOX): recessed housing with cover, valve configured for system flush, connection accessories.
 (430036): control plate, 6V lithium batteries, collar for waterproofing, valve, solenoid valve, filter and stopcock.

ADVANTAGES



Total hygiene: no manual contact



3 rinse programmes and high-frequency mode








Hygienic duty flush



Waterproof housing, adjustable and modular

TECHNICAL CHARACTERISTICS

TEMPOMATIC 4 urinal valve - Ref. 430PBOX-430036

Supply	6 V battery-operated
Connector	F1/2"
Technology	Electronic
Height	145mm
Depth	83 - 190mm
Width	145mm
Flow rate	0.15 l/sec
Norms	    
Warranty	