

SPORTING 2 SECURITHERM electronic shower panel

Ref. 714916

Battery-operated, thermostatic, rain-effect spray, kit 2/2

2025 UK public price excluding VAT: £458.94

DESCRIPTION

SPORTING 2 SECURITHERM electronic shower panel - Ref. 714916

SPORTING 2 SECURITHERM, thermostatic electronic shower panel, kit 2/2:
Recessed inlets.
Anodised aluminium and chrome-plated satin finish panel.
Slimline structure with concealed fixings
Battery-operated with CR123 6V Lithium batteries.
Infrared presence detection. Shower starts when hand is moved towards the sensor (detection distance ~4cm).
Shuts off voluntarily or automatically after ~60 seconds.
Duty flush (~60 seconds every 24 hours after the last use).
Flow rate 6 lpm at 3 bar.
Tamperproof, rain-effect fixed shower head with automatic flow rate regulation.
Accessible filters and non-return valves.
Integrated stopcocks.
M $\frac{1}{2}$ " connections (Compact nanny joint, kit 1/2).
Electronic shower panel suitable for people with reduced mobility.
30-year warranty.
SECURITHERM technology:
Thermostatic mixer directly integrated in the head of the shower panel.
Temperature set by the installer.
Stable temperature, pre-set at 38°C.
Anti-scalding failsafe: automatic shut-off if the cold water fails.
Anti-cold showers function: automatic shut-off if the hot water fails.
Order with support bracket 714612.

TECHNICAL CHARACTERISTICS

SPORTING 2 SECURITHERM electronic shower panel - Ref. 714916

| | |
|------------|----------------------------|
| Supply | CR123 6V Lithium batteries |
| Connector | M $\frac{1}{2}$ " |
| Technology | Electronic |
| Height | 1020mm |
| Depth | 21mm |
| Width | 70mm |
| Flow rate | 6 lpm |
| Finish | Aluminium |



ADVANTAGES



Exceptional water savings: 80%




Anti-bacterial proliferation duty flush



Immediate shut-off if cold water fails



Sleek shapes, concealed fixings

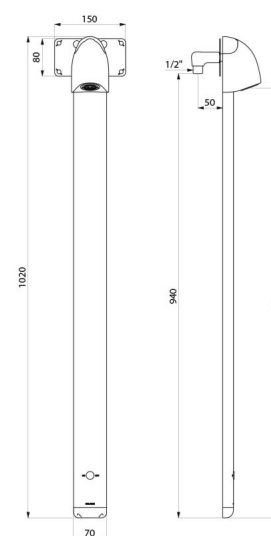

Norms



Warranty

