

# Mechanical mixer for sinks or troughs

Ref. 2564T1

Single control single hole tall mixer with ceramic cartridge

2026 UK public price excluding VAT: £252.94

## DESCRIPTION

Mechanical mixer for sinks or troughs - Ref. 2564T1

Deck-mounted mechanical basin mixer.  
Single control single hole mixer with swivelling spout H. 165mm L. 140mm.  
Tall mixer with BIOSAFE hygienic outlet suitable for fitting a BIOFIL point-of-use filter.  
Ø 35mm classic ceramic cartridge with pre-set maximum temperature limiter.  
Body and spout with smooth interiors (reduces bacterial development).  
No risk of cross flow between the hot and cold water.  
No non-return valves on the inlets.  
Thermal shocks are easy to undertake without removing the control lever or shutting off the cold water.  
Flow rate regulated at 5 lpm.  
Chrome-plated body, base and spout.  
Hygiene control lever L. 185mm requires no manual contact.  
PEX flexibles F3/8".  
Fixings reinforced by 2 stainless steel rods and back-nuts.  
Mechanical mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.  
Single hole mixer suitable for people with reduced mobility.  
Mixer with 30-year warranty.

## TECHNICAL CHARACTERISTICS

Mechanical mixer for sinks or troughs - Ref. 2564T1


|                     |                     |
|---------------------|---------------------|
| Connector           | F3/8"               |
| Height              | 322mm               |
| Drop height         | 165mm               |
| Spout length        | 140mm               |
| Flow rate           | 5 lpm               |
| Temperature limiter | Yes                 |
| Finish              | Chrome-plated brass |

|          |                                                                                                                                                                                                                                                                                                                                                 |
|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Norms    |     |
| Warranty |                                                                                                                                                                                                                                                              |



## ADVANTAGES

-  Hygiene: smooth interior reduces bacteria
-  Thermal shock without removing the control lever
-  Optimised drop height and spout length
-  No manual contact thanks to Hygiene control lever

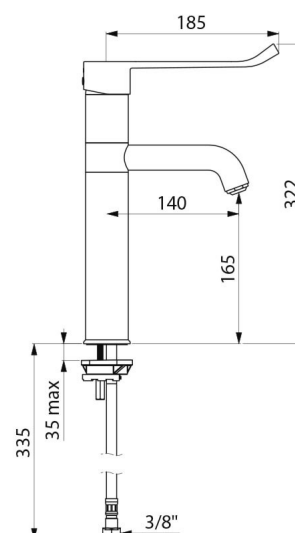

Repairability

