

SECURITHERM thermostatic sequential sink mixer

Ref. H962015

Single hole thermostatic sequential mixer H. 160mm L. 140mm

2025 UK public price excluding VAT: £415.34

DESCRIPTION

SECURITHERM thermostatic sequential sink mixer - Ref. H962015

Deck-mounted SECURITHERM thermostatic sink mixer.
Thermostatic sequential mixer: opens and closes with cold water.
Single hole mixer with curved spout H. 160mm L. 140mm with hygienic flow straightener for no impurity retention and thermal shock-resistant.
Anti-scalding failsafe: automatic shut-off if cold or hot water supply fails.
Securitouch thermal insulation prevents burns.
No risk of cross flow between hot and cold water.
No non-return valves on the inlets.
Scale-resistant sequential thermostatic cartridge for single lever control of flow rate and temperature.
Temperature can be adjusted from cold water up to 40°C with temperature limiter set at 40°C.
Tested without water to comply with NHS requirements. No pre-set temperature.
Thermal or chemical shocks are possible.
Body and spout with smooth interiors and low water volume.
Flow rate regulated at 9 lpm.
No manual contact thanks to Hygiene control lever L. 146mm.
No pop-up waste.
Supplied with stainless steel F3/8" PEX flexibles with chrome-plated brass stopcocks, filters and Ø 15mm conical inlets.
Reinforced fixing via 2 stainless steel rods.
Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
Suitable for people with reduced mobility.
30-year warranty.
Also available with copper tails.

TECHNICAL CHARACTERISTICS


SECURITHERM thermostatic sequential sink mixer - Ref. H962015

Supply	1/2", Ø 15mm
Technology	Thermostatic sequential mixer
Drop height	160mm
Spout length	140mm
Flow rate	9 lpm
Temperature limiter	Yes
Finish	Chrome-plated brass



ADVANTAGES

-  Sequential: opens/closes with cold water
-  Maximum hygiene: no non-return valves
-  SECURITHERM: optimal anti-scalding safety
-  Thermostatic: total temperature stability

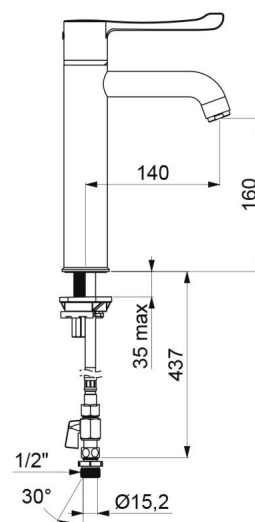

Warranty



Repairability

