

BIOSAFE mechanical basin mixer

Ref. 2920L

Single hole mechanical mixer H. 100mm L. 110mm

2025 UK public price excluding VAT: £261.11



DESCRIPTION

BIOSAFE mechanical basin mixer - Ref. 2920L

Deck-mounted mechanical basin mixer.
Single hole mixer with spout H. 100mm L. 110mm fitted with a BIOSAFE hygienic outlet.
Spout suitable for fitting a BIOFIL point-of-use filter.
Ø 35mm ceramic cartridge with pre-set maximum temperature limiter.
Spout with a tube with a smooth interior, no niches where bacteria can develop, and low water volume.
The speed with which the water flows through the tube considerably reduces biofilm development.
Thermal shocks are possible without removing the lever or shutting off the cold water supply.
Body with very low flow water volume (reduces bacterial development).
Flow rate regulated at 5 lpm.
Hygiene control lever L. 150mm.
Ergonomic, brass pop-up waste 1 1/4".
F3/8" rotating PEX flexibles.
Fixing reinforced via 2 stainless steel rods.
Mechanical mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
Single hole mixer suitable for people with reduced mobility.
No risk of cross flow between the hot and cold water.
No non-return valves on the inlets.
Mixer with 30-year warranty.

TECHNICAL CHARACTERISTICS

BIOSAFE mechanical basin mixer - Ref. 2920L

| | |
|---------------------|---|
| Connector | F3/8" |
| Technology | BIOSAFE mechanical mixer |
| Drop height | 100mm |
| Spout length | 110mm |
| Flow rate | 5 lpm |
| Temperature limiter | Yes |
| Finish | Chrome-plated brass |
| Norms | ACS  |
| Warranty |  |



ADVANTAGES



Hygiene: body with very low water volume




Thermal shock without removing the control lever



Pre-set maximum temperature limiter



Hygiene lever for no manual contact

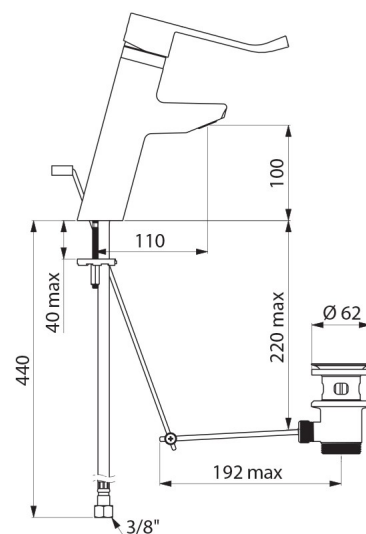

Repairability

