

# SECURITHERM sequential thermostatic basin mixer

Ref. H9601

Single hole sequential thermostatic mixer H. 95mm L. 120mm

2025 UK public price excluding VAT: £371.44

## DESCRIPTION

SECURITHERM sequential thermostatic basin mixer - Ref. H9601

Deck-mounted SECURITHERM thermostatic basin mixer.  
Thermostatic sequential mixer: opens and closes with cold water.  
No risk of cross flow between the hot and cold water.  
No non-return valves on the inlets.  
Single hole mixer with curved spout H. 95mm L. 120mm fitted with a hygienic flow straightener for no impurity retention and thermal shock-resistant.  
Anti-scalding failsafe: shuts off automatically if the cold or hot water supply fails.  
Securitouch thermal insulation prevents burns.  
Scale-resistant sequential thermostatic cartridge for single lever control of flow rate and temperature.  
Temperature can be adjusted from cold water up to 40°C with temperature limiter set at 40°C.  
Thermal or chemical shocks are possible.  
Body and spout with smooth interiors and low water volume.  
Flow rate limited to 5 lpm at 3 bar.  
No manual contact thanks to Hygiene control lever L. 146mm.  
Ergonomic stainless steel pop-up waste 11/4".  
Supplied with PEX flexibles F3/8" with chrome-plated brass stopcocks.  
Fixing reinforced via 2 stainless steel rods.  
Thermostatic mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.  
Suitable for people with reduced mobility.  
30-year warranty.  
Also available with copper tails.

## TECHNICAL CHARACTERISTICS


SECURITHERM sequential thermostatic basin mixer - Ref. H9601

|                     |                               |
|---------------------|-------------------------------|
| Connector           | F3/8"                         |
| Technology          | Sequential thermostatic mixer |
| Drop height         | 95mm                          |
| Spout length        | 120mm                         |
| Flow rate           | 5 lpm at 3 bar                |
| Temperature limiter | Yes                           |
| Finish              | Chrome-plated brass           |
| Norms               | ACS                           |



## ADVANTAGES

-  Sequential: opens/closes with cold water
-  Maximum hygiene: no non-return valves
-  SECURITHERM: optimal anti-scalding safety
-  Securitouch: thermal insulation prevents burns

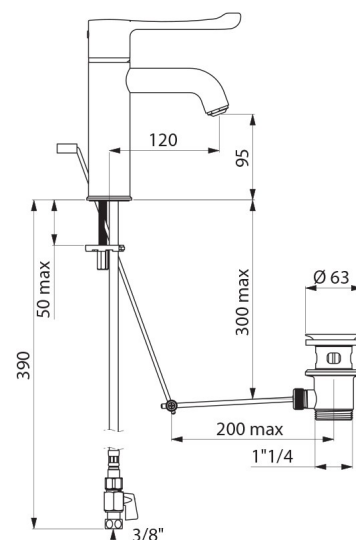

Warranty



Repairability

