

SECURITHERM sequential thermostatic basin mixer

Ref. H9601

Single hole sequential thermostatic mixer H. 95mm L. 120mm

2025 UK public price excluding VAT: £371.44

DESCRIPTION

SECURITHERM sequential thermostatic basin mixer - Ref. H9601

Deck-mounted SECURITHERM thermostatic basin mixer.
Thermostatic sequential mixer: opens and closes with cold water.
No risk of cross flow between the hot and cold water.
No non-return valves on the inlets.
Single hole mixer with curved spout H. 95mm L. 120mm fitted with a hygienic flow straightener for no impurity retention and thermal shock-resistant.
Anti-scalding failsafe: shuts off automatically if the cold or hot water supply fails.
Securitouch thermal insulation prevents burns.
Scale-resistant sequential thermostatic cartridge for single lever control of flow rate and temperature.
Temperature can be adjusted from cold water up to 40°C with temperature limiter set at 40°C.
Thermal or chemical shocks are possible.
Body and spout with smooth interiors and low water volume.
Flow rate limited to 5 lpm at 3 bar.
No manual contact thanks to Hygiene control lever L. 146mm.
Ergonomic brass pop-up waste 11/4".
Supplied with PEX flexibles F3/8" with chrome-plated brass stopcocks.
Fixing reinforced via 2 stainless steel rods.
Thermostatic mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
Suitable for people with reduced mobility.
30-year warranty.
Also available with copper tails.





TECHNICAL CHARACTERISTICS


SECURITHERM sequential thermostatic basin mixer - Ref. H9601

Connector	F3/8"
Technology	Sequential thermostatic mixer
Drop height	95mm
Spout length	120mm
Flow rate	5 lpm at 3 bar
Temperature limiter	Yes
Finish	Chrome-plated brass
Norms	ACS



ADVANTAGES

-  Sequential: opens/closes with cold water
-  Maximum hygiene: no non-return valves
-  SECURITHERM: optimal anti-scalding safety
-  Securitouch: thermal insulation prevents burns

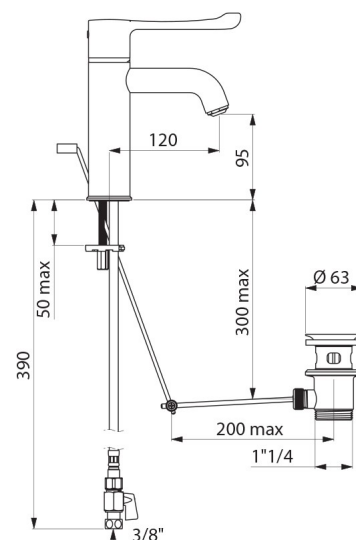

Warranty	
Repairability	