

Shower kit with SECURITHERM thermostatic mixer

Ref. H9768HYG

Securitouch thermostatic shower mixer with non-return valves

2024 UK public price excluding VAT: £466.43



DESCRIPTION

Shower kit with SECURITHERM thermostatic mixer - Ref. H9768HYG

SECURITHERM dual control thermostatic shower kit with auto-draining device:

- Shower mixer with scale-resistant thermostatic cartridge:
No risk of cross flow between hot and cold water.
Thermostatic mixer with no non-return valves on the inlets (reduced bacterial proliferation).
 - Mixer with anti-scalding failsafe: shuts off automatically if cold water supply fails.
 - Prevents cold showers: shuts off automatically if hot water supply fails.
 - Securitouch thermal insulation prevents burns.
 - Scale-resistant thermostatic cartridge for temperature adjustment.
 - ¼-turn ceramic head for flow rate adjustment.
 - Temperature control up to 43°C.
 - Double temperature limiter: 1st limiter set at 41°C, 2nd limiter set at 43°C.
 - Thermal shocks are possible without removing the control knob or shutting off the cold water supply.
 - Flow rate limited to 9 lpm at 3 bar.
 - Ergonomic controls.
 - M½" shower outlet.
 - F¾" inlets with integrated filters.
 - Supplied with 2 offset STOP/CHECK M1/2" M3/4" connectors ideal for hospitals.
 - Shower head (ref. 813) and chrome-plated wall-mounted adjustable support (ref. 845).
 - Auto-draining device FM1/2" for installation between the bottom outlet and the flexible shower hose, automatically drains the shower head and flexible hose (ref. 880).
- Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
Mixers suitable for people with reduced mobility.
Shower mixer with 30-year warranty.

ADVANTAGES



SECURITHERM: optimum anti-scalding safety



Maximum hygiene: no non-return valves



Securitouch thermal insulation prevents burns




Thermostatic: total temperature stability

TECHNICAL CHARACTERISTICS

Shower kit with SECURITHERM thermostatic mixer - Ref. H9768HYG

Connector	M1/2"
Technology	SECURITHERM Securitouch thermostatic mixer, no non-return valves
Length	260mm
Flow rate	9 lpm at 3 bar
Temperature limiter	Yes
Finish	Chrome-plated brass

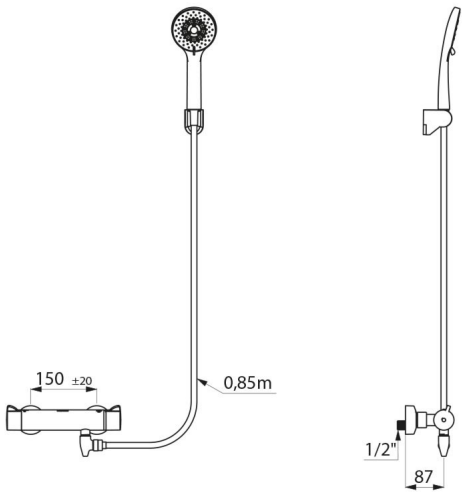

Norms	ACS
Warranty	