

Shower kit with SECURITHERM thermostatic mixer

Ref. H9768SHYG

Securitouch thermostatic shower mixer with non-return valves

2024 UK public price excluding VAT: £426.61

DESCRIPTION

Shower kit with SECURITHERM thermostatic mixer - Ref. H9768SHYG

SECURITHERM dual control thermostatic shower kit with auto-draining device:

- Shower mixer with scale-resistant thermostatic cartridge:
No risk of cross flow between hot and cold water.

Thermostatic mixer with no non-return valves on the inlets (reduced bacterial proliferation).

Mixer with anti-scalding failsafe: shuts off automatically if cold water supply fails.

Prevents cold showers: shuts off automatically if hot water supply fails.

Securitouch thermal insulation prevents burns.

Scale-resistant thermostatic cartridge for temperature adjustment.

¼-turn ceramic head for flow rate adjustment.

Temperature control up to 43°C.

Double temperature limiter: 1st limiter set at 41°C, 2nd limiter set at 43°C.

Thermal shocks are possible without removing the control knob or shutting off the cold water supply.

Flow rate limited to 9 lpm at 3 bar.

Ergonomic controls.

M½" shower outlet.

F¾" inlets with integrated filters.

Supplied with 2 offset M1/2" M3/4" connectors

- Shower head (ref. 813) and chrome-plated wall-mounted adjustable support (ref. 845).

- Auto-draining device FM1/2" for installation between the bottom outlet and the flexible shower hose, automatically drains the shower head and flexible hose (ref. 880).

Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.

Mixers suitable for people with reduced mobility.

Shower mixer with 30-year warranty.

TECHNICAL CHARACTERISTICS

Shower kit with SECURITHERM thermostatic mixer - Ref. H9768SHYG

Connector	M1/2"
Technology	SECURITHERM Securitouch thermostatic mixer, no non-return valves
Length	260 mm
Flow rate	9 lpm at 3 bar
Temperature limiter	Yes
Finish	Chrome-plated brass



ADVANTAGES



SECURITHERM: optimum anti-scalding safety




Maximum hygiene: no non-return valves



Securitouch thermal insulation prevents burns



Thermostatic: total temperature stability

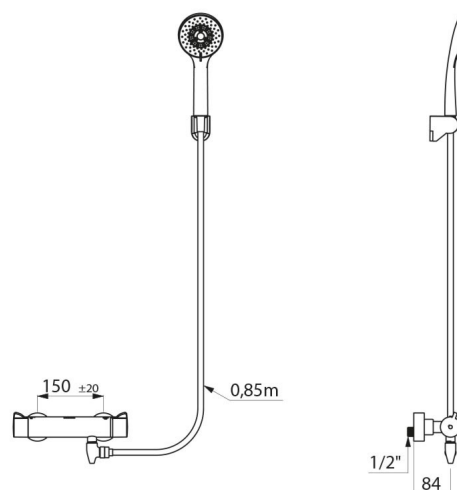

Norms	ACS
Warranty	