

# SECURITHERM BIOCLIP sequential thermostatic sink mixer

Ref. H962515

Removable sequential thermostatic mixer H. 160mm L. 140mm

2026 UK public price excluding VAT: £514.08

## DESCRIPTION

**SECURITHERM BIOCLIP sequential thermostatic sink mixer - Ref. H962515**

Deck-mounted thermostatic SECURITHERM sink mixer.  
Sequential thermostatic mixer: opens and closes with cold water.  
No risk of cross flow between the hot and cold water.  
No non-return valves on the inlets.  
BIOCLIP: mixer is easy to remove for cleaning and disinfection.  
Anti-scalding failsafe: shuts off automatically if cold or hot water supply fails.  
Securitouch thermal insulation prevents burns.  
Single hole mixer with curved spout H. 160mm L. 140mm fitted with a hygienic flow straightener with no impurity retention and thermal shock-resistant.  
Scale-resistant sequential thermostatic cartridge for single control of flow rate and temperature.  
Temperature adjusts from cold water up to 40°C with temperature limiter set at 40°C.  
Tested without water to comply with NHS requirements. No pre-set temperature.  
Thermal and chemical shocks are possible.  
Body and spout with smooth interiors and low water volume.  
Flow rate 9 lpm at 3 bar.  
No manual contact thanks to Hygiene control lever L. 146mm.  
No pop-up waste.  
Supplied with PEX flexibles F3/8" with chrome-plated brass stopcocks, filters and conical inlets Ø 15mm.  
Fixing reinforced by 2 stainless steel rods.  
Thermostatic mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.  
Sequential mixer suitable for people with reduced mobility.  
30-year warranty.  
Also available with copper tails.

## TECHNICAL CHARACTERISTICS


**SECURITHERM BIOCLIP sequential thermostatic sink mixer - Ref. H962515**

Supply	1/2", Ø 15mm
Technology	Removable sequential thermostatic mixer
Drop height	160mm
Spout length	140mm
Flow rate	9 lpm
Temperature limiter	Yes



## ADVANTAGES

-  Maximum hygiene: mixer with no non-return valves
-  Hygiene: can be removed for internal cleaning
-  SECURITHERM: optimal anti-scalding safety
-  Sequential: opens and closes with cold water

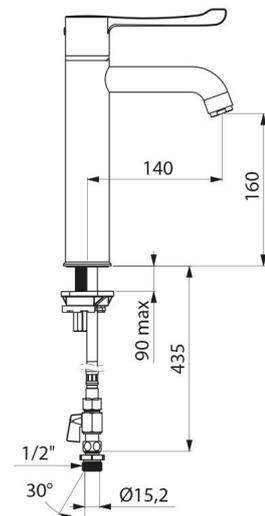

---

Finish Chrome-plated brass

---

Warranty



Repairability

