

# SECURITHERM EP pressure-balancing basin mixer

Ref. 2565T1EP

Tall, single hole, single control mixer with EP cartridge

## DESCRIPTION

**SECURITHERM EP pressure-balancing basin mixer - Ref. 2565T1EP**

Deck-mounted basin mixer with SECURITHERM pressure-balancing. Single hole, single control mixer with fixed spout H. 165mm L. 140mm. Tall mixer with BIOSAFE hygienic flow straightener suitable for fitting a BIOFIL terminal filter.

Total anti-scalding safety: HW flow rate is reduced if CW water supply fails (and vice versa).

Stable temperature regardless of pressure and flow rate variations in the system.

Ø 35mm ceramic pressure-balancing cartridge with pre-set maximum temperature limiter.

Body and spout with smooth interiors (reduces bacterial development).

Thermal shocks are easy to undertake a thermal shock without removing the lever or shutting off the cold water supply.

Flow rate regulated at 5 lpm.

Body and base made from chrome-plated brass.

Hygiene control lever L. 185mm requires no manual contact.

Supplied with F3/8" PEX flexibles with filters and non-return valves.

Reinforced fixing via 2 stainless steel rods.

Mechanical mixer with pressure-balancing ideal for healthcare facilities, retirement and care homes, hospitals and clinics.

Single hole mixer suitable for people with reduced mobility.

30-year warranty.

## TECHNICAL CHARACTERISTICS

**SECURITHERM EP pressure-balancing basin mixer - Ref. 2565T1EP**

|                     |                      |
|---------------------|----------------------|
| Connector           | F3/8"                |
| Technology          | SECURITHERM EP mixer |
| Height              | 291mm                |
| Drop height         | 160mm                |
| Spout length        | 140mm                |
| Flow rate           | 5 lpm                |
| Temperature limiter | Yes                  |
| Finish              | Chrome-plated brass  |



## ADVANTAGES



EP: HW flow rate reduced if CW fails




EP: reduces pressure variations



Thermal shock without removing the control lever



Hygiene: smooth interior reduces bacteria

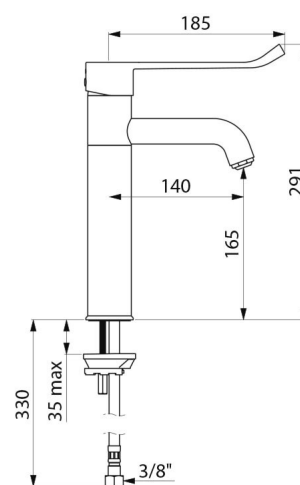

Norms



Warranty



Repairability

