

# SECURITHERM BIOCLIP

## sequential thermostatic sink mixer

Ref. H9625

Removable sequential thermostatic mixer H. 160mm L. 140mm

### DESCRIPTION

**SECURITHERM BIOCLIP sequential thermostatic sink mixer - Ref. H9625**

Deck-mounted thermostatic SECURITHERM sink mixer.  
 Sequential thermostatic mixer: opens and closes with cold water.  
 No risk of cross flow between the hot and cold water.  
 No non-return valves on the inlets.  
 BIOCLIP: mixer is easy to remove for cleaning and disinfection.  
 Anti-scalding failsafe: shuts off automatically if cold or hot water supply fails.  
 Securitouch thermal insulation prevents burns.  
 Single hole mixer with curved spout H. 160mm L. 140mm fitted with a hygienic flow straightener with no impurity retention and thermal shock-resistant.  
 Scale-resistant sequential thermostatic cartridge for single control of flow rate and temperature.  
 Temperature adjusts from cold water up to 40°C with temperature limiter set at 40°C.  
 Thermal and chemical shocks are possible.  
 Body and spout with smooth interiors and low water volume.  
 Flow rate 9 lpm at 3 bar.  
 No manual contact thanks to Hygiene control lever L. 146mm.  
 No pop-up waste.  
 Supplied with PEX flexibles F3/8" with chrome-plated brass stopcocks.  
 Fixing reinforced by 2 stainless steel rods.  
 Thermostatic mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.  
 Sequential mixer suitable for people with reduced mobility.  
 30-year warranty.  
 Also available with copper tails.





### TECHNICAL CHARACTERISTICS


**SECURITHERM BIOCLIP sequential thermostatic sink mixer - Ref. H9625**

Supply	3/8"
Technology	Removable sequential thermostatic mixer
Drop height	160mm
Spout length	140mm
Flow rate	9 lpm
Temperature limiter	Yes
Finish	Chrome-plated brass
Warranty	



### ADVANTAGES

-  Maximum hygiene: mixer with no non-return valves
-  Hygiene: can be removed for internal cleaning
-  SECURITHERM: optimal anti-scalding safety
-  Sequential: opens and closes with cold water

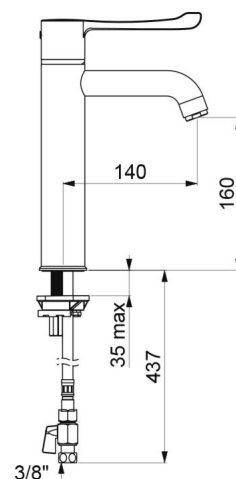

Repairability

